


Jan, 2019

Product Spec Sheet
DA CONVERTER
ML-4D/OUT-E

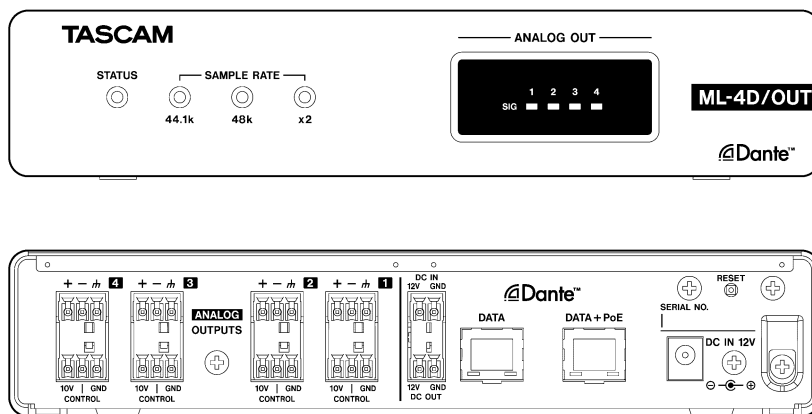

■ **Specifications**

General

• **Formats and channels**

44.1/48/88.2/96 kHz, 16/24-bit, 4 channels

Input/output ratings

• **DATA/DATA+PoE connectors**

Connector: RJ-45
 Transmission protocol: Dante
 Gigabit Ethernet standard: 1000BASE-T (IEEE 802.3ab)
 Cables: category 5e or faster STP cables

• **ANALOG OUT connectors**


Connector: Euroblock (balanced) 3.81 mm pitch
 Nominal output levels: +4 dBu (when Ref. Level not -9 dBFS)
 +6 dBu (when Ref. Level set to -9 dBFS)
 Maximum output level (switchable): +15 dBu (Ref. Level: -9 dBFS)
 +18 dBu (Ref. Level: -14 dBFS)
 +20 dBu (Ref. Level: -16 dBFS)
 +22 dBu (Ref. Level: -18 dBFS)
 +24 dBu (Ref. Level: -20 dBFS)
 Output impedance: 200 Ω or lower

● 0 dBu = 0.775 Vrms

Control input/output

•External control connectors (CONTROL)

Connectors: Euroblock (balanced) 3.81 mm pitch
10 V/CONTROL/GND connectors: Connect variable resistors (10 k Ω recommended)



Audio performance

● DANTE IN ⇒ LINE OUT

•Frequency response

±0.5 dB: 20 Hz – 20 kHz (44.1/48 kHz sampling frequency, JEITA)

±0.5 dB: 20 Hz – 40 kHz (88.2/96 kHz sampling frequency, JEITA)

•Distortion (THD+N)

0.002 % (when –1 dBFS input, 44.1/48/88.2/96 kHz sampling frequency, JEITA)

•S/N ratio

105 dB (44.1/48/88.2/96 kHz sampling frequency, JEITA)

•Crosstalk

100 dB (44.1/48/88.2/96 kHz sampling frequency, JEITA)

•Dynamic range

108 dB (44.1/48/88.2/96 kHz sampling frequency, JEITA)

Note: JEITA indicates compliance with JEITA CP-2150

Other

•Power

PoE class 0

TASCAM PS-P1220E AC adapter (sold separately)

•Power consumption

4 W

•Dimensions

214 × 44.45 × 136.1 mm (W × H × D, including protrusions)

•Weight



863 g

•Operating temperature range


0°C – 40°C

■ Dimensional drawings

• Main unit

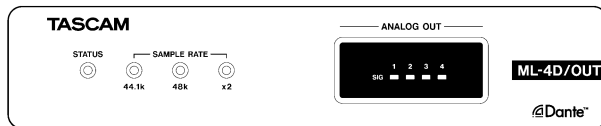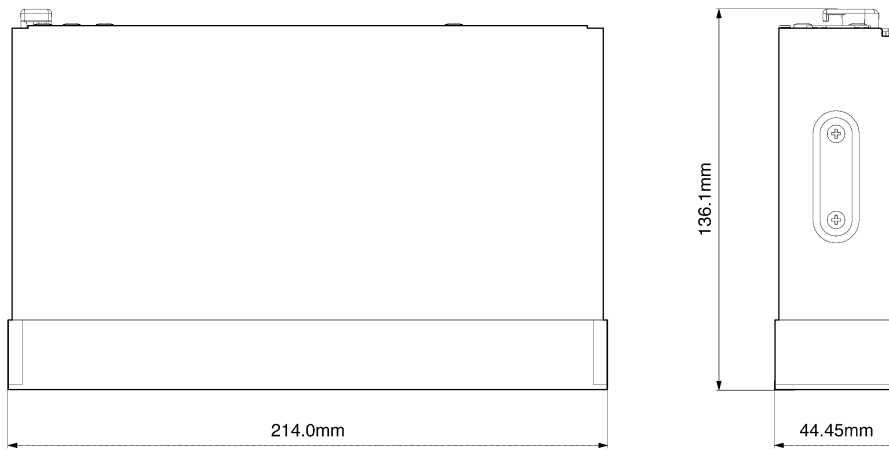

• Main unit with brackets installed

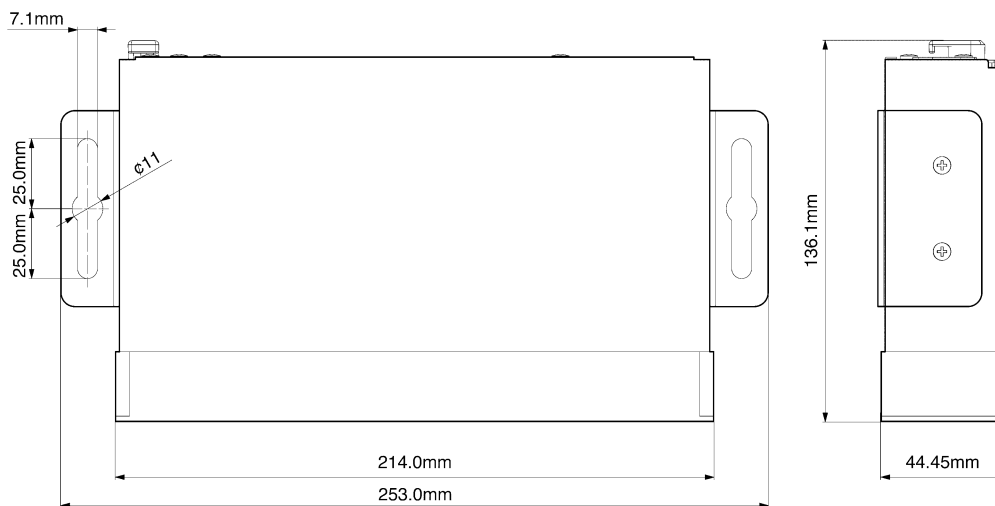

※TASCAM is trademark of TEAC CORPORATION, registered in the U.S. and other countries.

※Other company names, product names and logos are the trademarks or registered trademarks of their owners.

※Specifications and appearance are subject to change without notice.

※All information included in this document is as of Jan, 2019.